



www.wipathcommunications.com

New Zealand

WiPath Communications Ltd

Postal: P.O. Box 76104, Manukau City, Auckland, 2241, New Zealand

Street: 14/114 Wiri Station Road, Wiri, Auckland, 2104, New Zealand

P: +64 9 302 1142 E: info@wipath.co.nz


ALPHANUMERIC PAGER



Touch Screen Watch Pager WP-100

The wrist-worn receiver WP-100 is capable of receiving notifications in alphanumeric messages. Made with compact size, it is equipped with a side button and a 1.54-inch color touch screen.

The charging and programming can be easily done via micro USB cable, in the meantime, the inbox can store up to 10 messages in 300 characters each for quick review. The long standby power up to 7 days allows the user to continue to receive the messages, which makes WP-100 as a perfect device for staffs to wear in the medical center, factories and storage industries... etc.

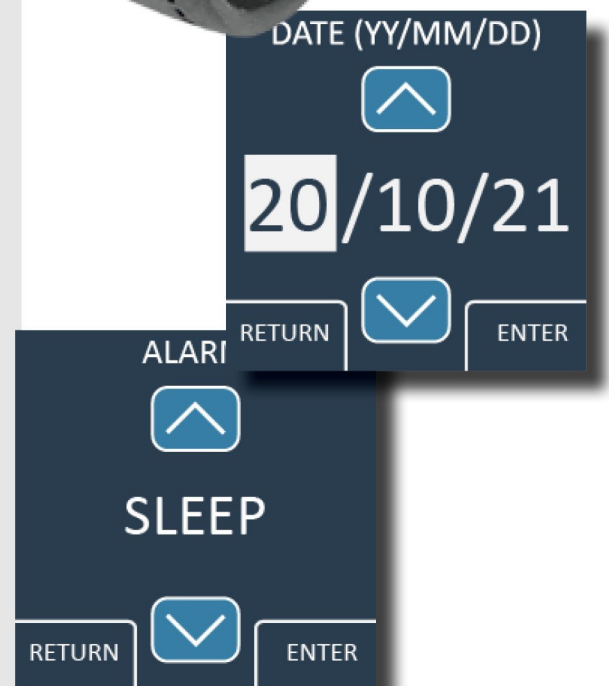



ALPHANUMERIC PAGER

Product Description

- One side button
- One Red LED indicator
- 1.54 inch touch screen
- 10 messages
- Capacity per message: 300 characters
- Beeping alarm, vibration and silent mode
- 3 brightness levels on backlit
- 3 Sound levels
- Auto scroll
- 2 Alarm clocks
- 100% waterproof
- Charging / programming by Micro USB cable
- PC program or manually programmable
- Standby period: 7 days
- Supported language: English

Additional Information

Frequency	UHF 430~470 MHz
Bit Rate	512 / 1200 / 2400bps for POCSAG
Channel Spacing	12.5KHz, 25KHz
Code Format	POCSAG
WB Sensitive Alpha	-122 dBm
NB Sensitive Alpha	-120 dBm
RF Spurious Rejection	50 dBc
1'st Image 500KHz	50 dBc
Adjacent Channel+/- 12.5KHz	50 dBc
Adjacent Channel+/- 25KHz	50 dBc
Frequency Tolerance	+/- 1ppm
Frequency Temperature Stability	< 3ppm @-10~60°C
Capcodes	6 Capcodes for POCSAG
Battery	Lipo battery 3.8V 400mAh
Total Can use Hours	180
Dimension	53(L) x 42(W) x 15(H) mm
Weight	44 g

ACCESSORIES



Adapter



MicroUSB